


| DESIG | 74       | DRAWN BY     | DART AEROSPAC |              |
|-------|----------|--------------|---------------|--------------|
| CHEC  |          | APPROVED _// | DRAWING NO.   | REV. B       |
|       | PH       |              | D2934         | SHEET 1 OF 1 |
| DATE  |          |              | TITLE         | SCALE        |
| 06.0  | 06.05.29 |              | SADDLE SPACER | 1:1          |
| Α     |          | 99.11.02     | NEW ISSUE     |              |

ADD 6061-T6 MATERIAL

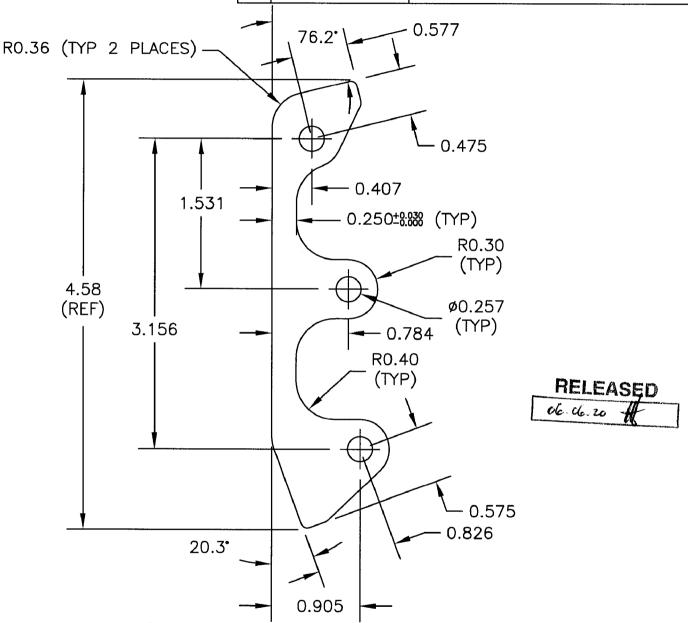

06.05.29

В

1) MATERIAL:

NOTES:

6061-T6 (PER QQ-A-250/11 OR AMS 4025 OR AMS 4027) 0.080" THICK

(REF DART SPEC M6061T6S.080)

OR

5052-H32/H34 (PER QQ-A-250/8 OR AMS 4016) 0.080" THICK

(REF DART SPEC M5052H32S.080)

- 2) FINISH: ACID ETCH AND ALODINE PER DART QSI 005 4.1
- TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) BREAK ALL SHARP EDGES 0.010 TO 0.020
- 5) ALL DIMENSIONS ARE IN INCHES

Copyright © 1999 by DART AEROSPACE USA, INC.

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.